

# Mira Vigour Thermostatic Dual Power Shower



COLD WATER  
CISTERN AND HOT  
WATER CYLINDER



YEAR GUARANTEE

True invigoration.  
The perfect blend of  
performance and safety  
with the added benefit  
of a dual outlet

## Product Information

Description	Colour	Product No.
Mira Vigour Thermostatic Dual	White/Chrome	1.1532.426

## Features & Benefits

### Temperature control

Thermostatic temperature control

Automatic shutdown if cold water fails

Factory set to safe maximum temperature

### Easy to fit

No need to prime

Accepts rising, falling and rear supplies

Replaces older Mira Vigour Models easily sharing the same connections and screw holes

### Easy to service

Removable filters and check valves

### For your customer

Separate temperature and flow controls

Maximum temperature stop to enhance the safety

Suited to homes with a low pressure water system and plentiful supply of hot water

Robust shower fittings with 1.25m shower hose

Dual Outlet - Diverts easily between an overhead deluge and separate handshower

200mm deluge overhead and 90mm single mode handshower



To download other resources, and for more  
information and advice on our products just visit:  
[www.mirashowers.co.uk](http://www.mirashowers.co.uk)

# Product Specification

## Tech Details

### Temperature Control

Control type: Thermostatic

### Installation

Supply voltage: 230v ± 10%

Supply rating: 3 amp

Terminal Block connections: Maximum 2.5mm<sup>2</sup>

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15mm dual entry push fit.  
Hot and Cold, 28mm pipe centres

Outlet connections: ½" BSP Male

Cistern: Minimum 230 litres

### Supply Conditions (hot and cold)

Cold water range: Up to 25°C

Hot water range: 50°C - 65°C max (recommended)

Minimum maintained pressure: 0.008 bar (80mm head)

Maximum maintained pressure: 0.5 bar (5 metre head)

Maximum static pressure: 1.0 bar (10 metre head)

### Performance

Temperature stability: ± 2°C

Flow rate: Up to 14 L/min from either outlet

### Safety Features

Factory set to safe max temp: Yes

Temperature override: Yes

### Accessories

Wide range of accessories available at [www.mirashowers.co.uk](http://www.mirashowers.co.uk)

### Approvals

CE approved

BEAB approved


Kiwa certified

WRAS approved (Water Regulations Advisory Scheme)

UKCA approved



## Dimensions

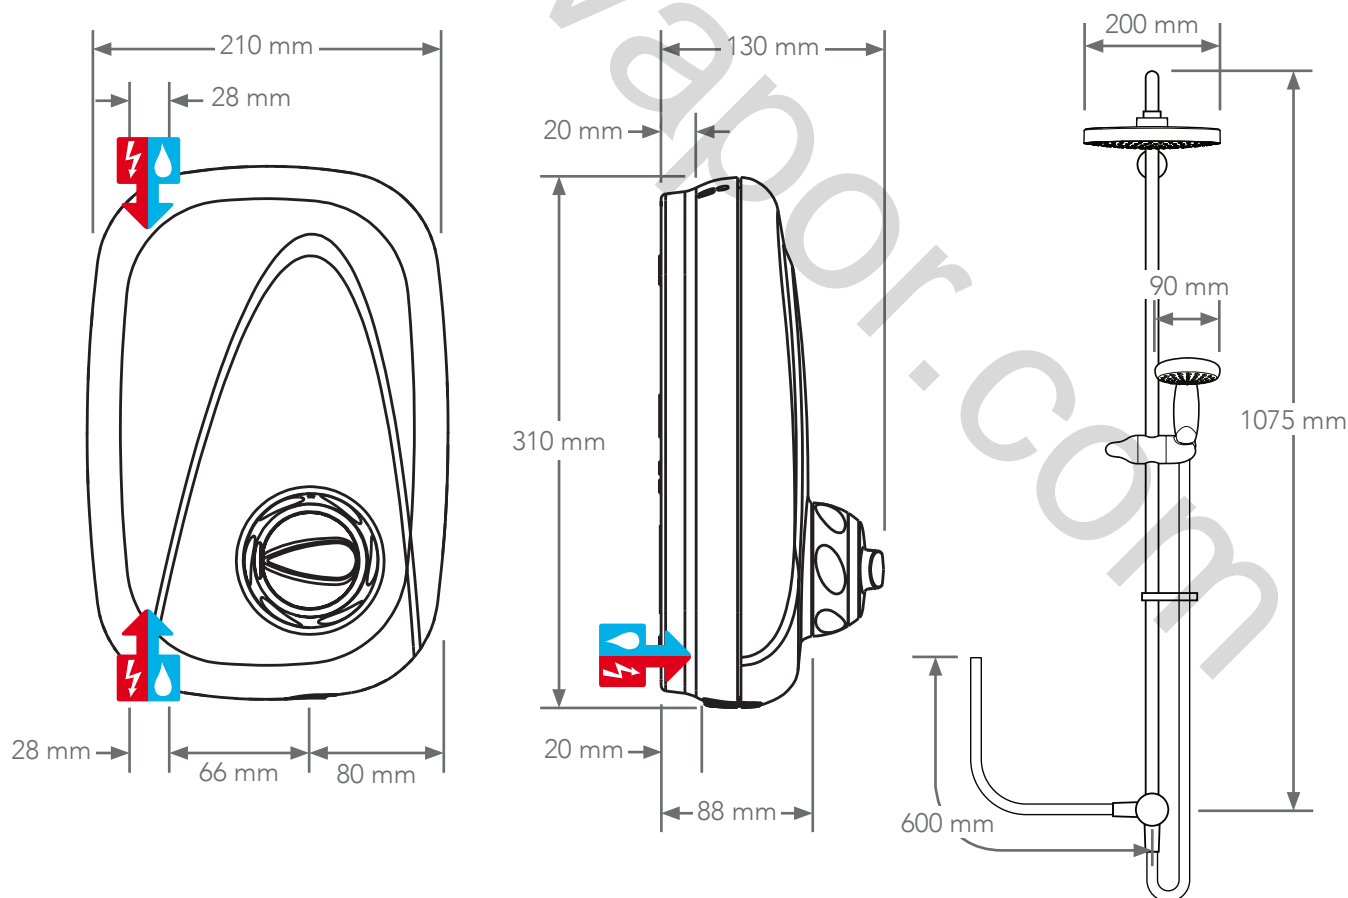

To download other resources, and for more information and advice on our products just visit: [www.mirashowers.co.uk](http://www.mirashowers.co.uk)

