

information and advice on our products just visit: www.mirashowers.co.uk



Product Specification

Tech Details

Temperature Control
Control type: Pressure stabilised
Installation
Power options: 8.5 & 9.5 kW
Supply voltage: $230v \pm 10\%$
Supply rating: 40 amp
Terminal Block connections: Maximum 10mm ²

Water entry points: Left (rising, falling & rear)

Cable entry points: Left (rising, falling & rear)

Inlet connections: 15 mm plastic stub, compression or push-fit fittings

Outlet connections: 1/2" BSP Male

Supply Conditions (hot and cold) Minimum maintained pressure: 0.7 bar (7 metre head)

Maximum maintained pressure: 5.0 bar (50 metre head)

Maximum static pressure: 10.0 bar (100 metre head)

Temperature stability: \pm 6°C

Phased shutdown: No

Factory set to safe max temp: No

Mira Sensi-flo™: No

Wide range of accessories available at www.mirashowers.co.uk

BEAB approved

Kiwa certified


WRAS approved (Water Regulations Advisory Scheme)





Intertek

Dimensions

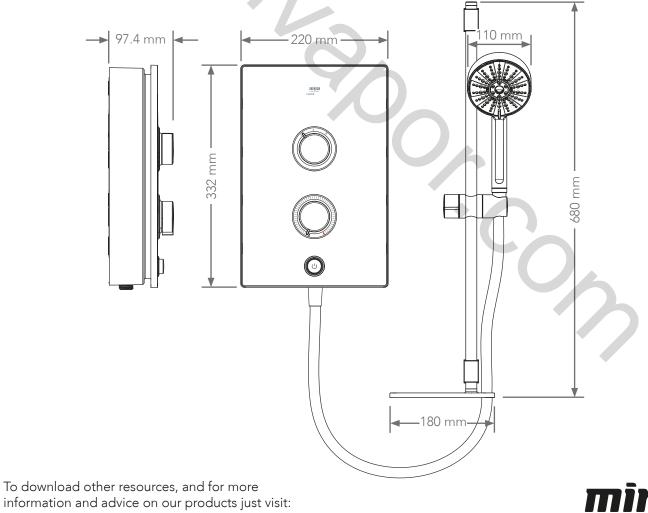

www.mirashowers.co.uk

