


100100744 chrome

Wall mounted exposed thermostatic shower mixer 1/2" with wax thermostatic element. Built in non-return valve. Safety stop at 38°C and Noken Eco-Stop button. Centre distance 150 +/-20 mm. Flow rate 21 l/min. at 3 bar.

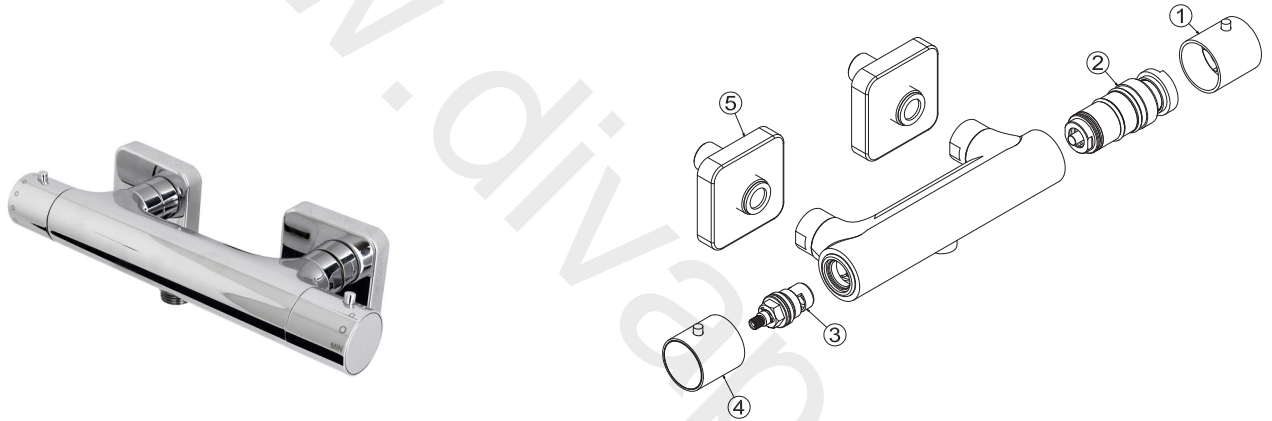

Spare parts

Versión: 1 : >=2016

POS.	SAP	ART.	RRP*
1	100109388	TEMPERATURE HANDLE THERMOS.URBAN S.-B.S.	-
2	100203453	THERMOSTATIC CARTRIDGE URBAN WALL MOUNT.	-
3	100109389	CERAMICA HEADWORK THERM.S.URBAN	-
4	100109387	FLOW RATE HANDLE THERM.URBAN S.	-
5	100109384	SQUARE ROSE WINDOW THERM.URBANS.-B.S.	-

Versión: 2 : <2016

POS.	SAP	ART.	RRP*
1	100109388	TEMPERATURE HANDLE THERMOS.URBAN S.-B.S.	-
2	100109383	THERMOSTATIC CARTRIDGE THERM.S-B.S.URBAN	-
3	100109389	CERAMICA HEADWORK THERM.S.URBAN	-
4	100109387	FLOW RATE HANDLE THERM.URBAN S.	-
5	100109384	SQUARE ROSE WINDOW THERM.URBANS.-B.S.	-