


36 503 892



- cover plate Ø 123 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge

| | | |
|---|--------------------------------|---------------|
|  | Matte Black | 36 503 892-33 |
|  | Chrome | 36 503 892-00 |
|  | Brushed Platinum | 36 503 892-06 |
|  | Platinum | 36 503 892-08 |
|  | Matte White | 36 503 892-10 |
|  | Dark Chrome | 36 503 892-19 |
|  | Brushed Durabronze (23kt Gold) | 36 503 892-28 |
|  | Brushed Champagne (22kt Gold) | 36 503 892-46 |
|  | Champagne (22kt Gold) | 36 503 892-47 |
|  | Brushed Chrome | 36 503 892-93 |
|  | Brushed Dark Platinum | 36 503 892-99 |

Required miscellaneous



xTOOL Concealed thermostat module without volume control 35 503 970 90
 •min. recess depth 95 mm
 •max. recess depth 160 mm

Recommended miscellaneous



xGRID Attachment set for integrating in the dry wall construction 12 340 970 90


Required miscellaneous




xGRID Installation track 555 mm 12 360 970 90

36 503 892

mm [inches]

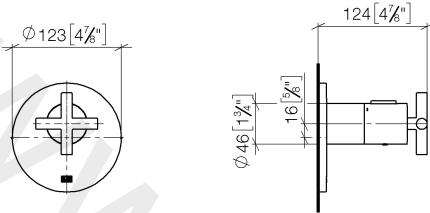

36 503 892

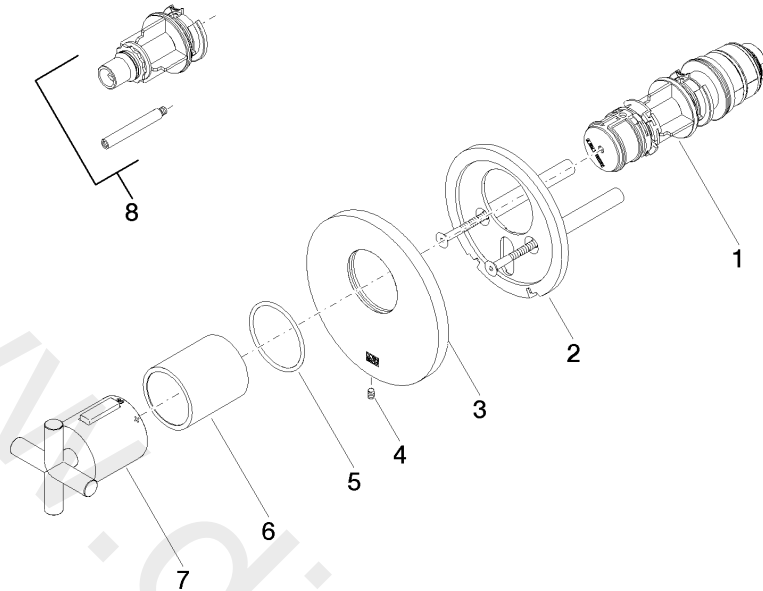

Spare parts list

| No. | Item Number | Name | Quantity used | Delivery time |
|-----|--------------------|-----------------|---------------|---------------|
| 1 | 90 15 02 065 00 90 | cartridge | 1 | 2 |
| 2 | 90 11 01 196 00 90 | base | 1 | 2 |
| 3 | 09 11 02 537-33 | cover | 1 | 30 |
| 4 | 09 31 11 048 90 | pin | 1 | 2 |
| 5 | 09 14 10 049 90 | seal | 1 | 2 |
| 6 | 09 21 02 112-33 | sleeve | 1 | 30 |
| 7 | 90 17 33 027 00-33 | handle | 1 | 30 |
| 8 | 12 178 970 90 | Extension 46 mm | 1 | 2 |