


VOLA 5100, 5100X, 5200V, 5300  
VOLA 5400DV, 5400V, 5400NV & A3/A4  
VOLA 5400TV, 5400FV, 5400RV & A3/A4  
VOLA 5600V & A3/A4

Fitting instruction  
Montageanleitung  
Monteringsvejledning

Monteringsvægledning  
Montage hanleiding  
Manuel de montage


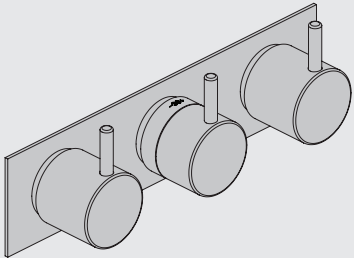


www.vola.com

5000\_V4\_40998504  
04-01-2023

5 705230 287317

|                                    | L                 | L1                | L2                | H               | H1              | D               |
|------------------------------------|-------------------|-------------------|-------------------|-----------------|-----------------|-----------------|
| 5400DV                             | 377 mm<br>14 3/4" | 260 mm<br>10"     | 268 mm<br>10"     | 95 mm<br>3 3/4" | 186mm<br>7 3/8" | 70 mm<br>2 3/4" |
| 5100, 5200V, 5300,<br>5400V, 5600V | 475 mm<br>19 3/4" | 355 mm<br>14"     | 367 mm<br>14 1/2" |                 |                 |                 |
| 5100X, 5400NV, 5400TV              | 552 mm<br>21 3/4" | 435 mm<br>17"     | 447 mm<br>17 5/8" |                 |                 |                 |
| 5400FV, 5400RV                     | 630 mm<br>25 1/2" | 514 mm<br>20 3/8" | 522 mm<br>20 1/2" |                 |                 |                 |

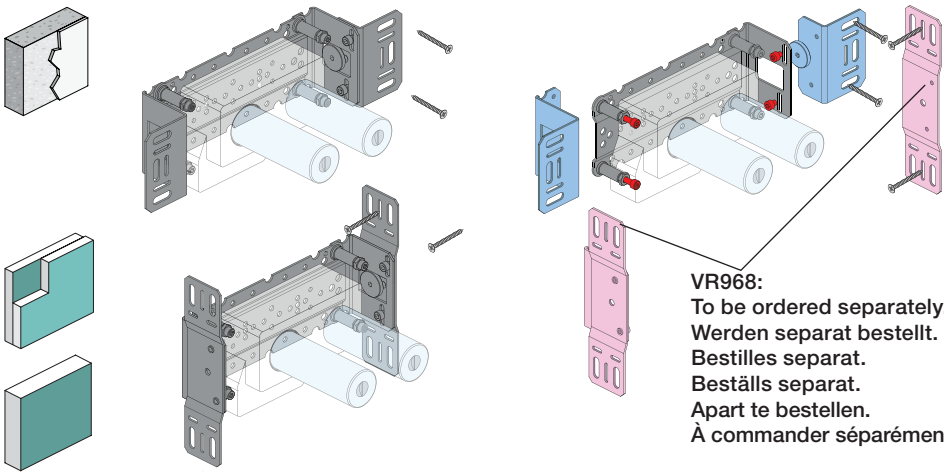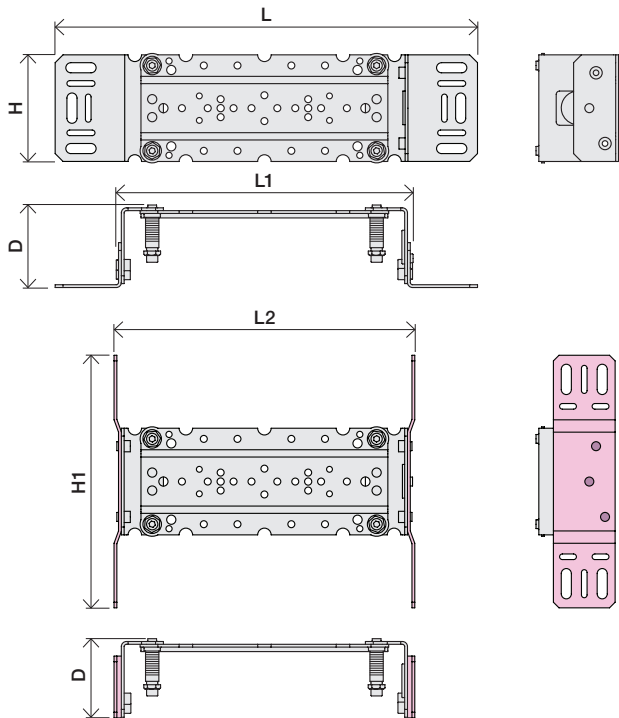

VR968:  
To be ordered separately.  
Werden separat bestellt.  
Bestilles separat.  
Apart te bestellen.  
À commander séparément.

**A** Max.: 10 Bar/145 psi  
Max. 65°C, 150°F

USA - For use with showerheads rated at 5.7 L/min. (1.5 gpm.) or higher.

Data, l/min. / (Gpm) 3 Bar/43.5 Psi:



5100/5200V/5300: **A** 5400/5600A3: **A** - **C**

5400/5600: **A** - **B** 5400/5600A4: **A** - **D**

AUS - Hot water inlet:  
Max. 50°C, 122°F.  
(AS 4032)

| 5400<br>5600 | 5400A3<br>5600A3 | 5400A4<br>5600A4 |          |          |          |          |          |          |          |
|--------------|------------------|------------------|----------|----------|----------|----------|----------|----------|----------|
| 2            | 2                | 2                | <b>A</b> | <b>M</b> | <b>B</b> | <b>M</b> | <b>C</b> | <b>M</b> | <b>D</b> |
| 3            | 3                | 4                |          |          |          |          |          |          |          |
| Out 2        | Out 1            | Out 1            | 32/(8.5) | 16/(4.2) | -        | -        | -        | -        | -        |
| Out 3        | Out 2            | Out 2            | -        | -        | 32/(8.5) | 16/(4.2) | -        | -        | -        |
| -            | Out 3            | Out 3            | -        | -        | -        | -        | 32/(8.5) | 16/(4.2) | -        |
| -            | -                | Out 4            | -        | -        | -        | -        | -        | -        | 32/(8.5) |


**B** Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

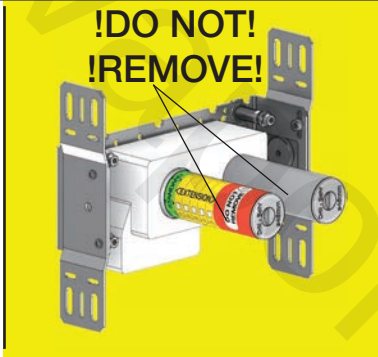

**C** DE: Bitte separat beiliegende Anleitung für die Schallentkopplung VR972 beachten


**D** Box till inbyggnadsblandare.  
Boks til indbygningsblander.  
Laatikko seinäasenteiselle sekoittajalle.

Ingår inte i leveransen, köps separat.  
Ikke inkludert, kjøpes separat.  
Eivät sisälly tilaukseen, ostettava erikseen.

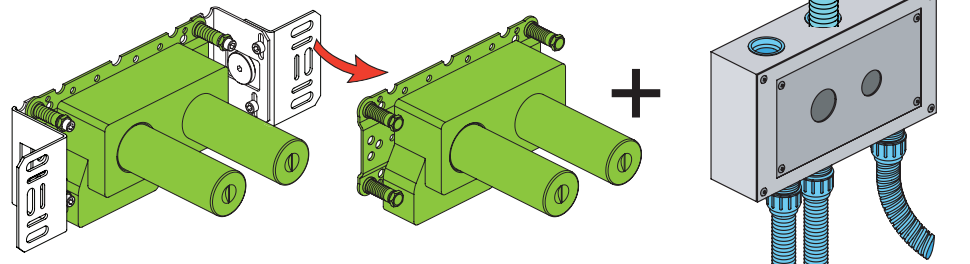


Extension  
Verlängerung  
Forlængerdele  
Förlängning  
Aanpassing  
Modification

**T** Min. 3 mm  
Max 65 mm



**Y** Min. 48 mm  
Max. 110 mm

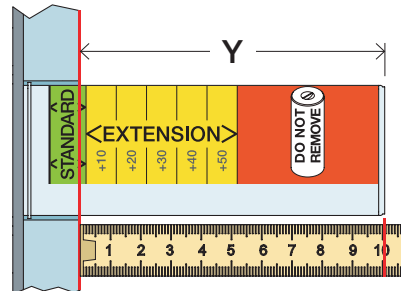


|                                                                                     | T          | Y           | VR5250/VR5410/VR2019 |
|-------------------------------------------------------------------------------------|------------|-------------|----------------------|
|  | 3 - 15 mm  | 110 - 98 mm | Std.                 |
|                                                                                     | 15 - 25 mm | 98 - 88 mm  | +10                  |
|                                                                                     | 25 - 35 mm | 88 - 78 mm  | +20                  |
|                                                                                     | 35 - 45 mm | 78 - 68 mm  | +30                  |
|                                                                                     | 45 - 55 mm | 68 - 58 mm  | +40                  |
|                                                                                     | 55 - 65 mm | 58 - 48 mm  | +50                  |

Fitting of extension  
Montage von verlängerung


Montering af forlængerdele  
Montering av förlängning

Montage van de verlengstukken  
Montage des rallonges





VR5250

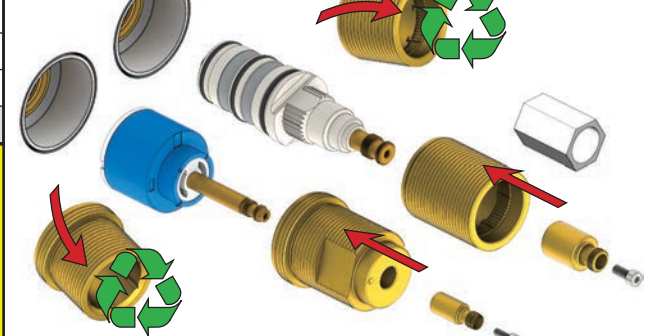

VR2019+, VR2119+

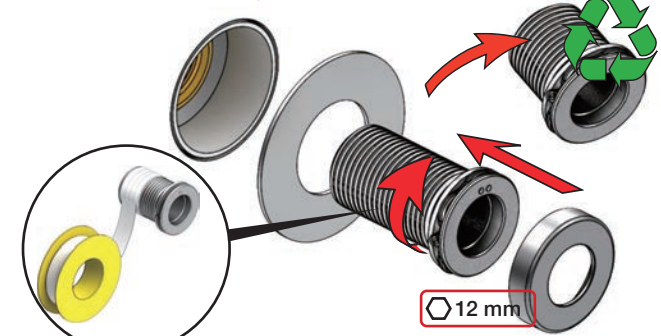

VR5410

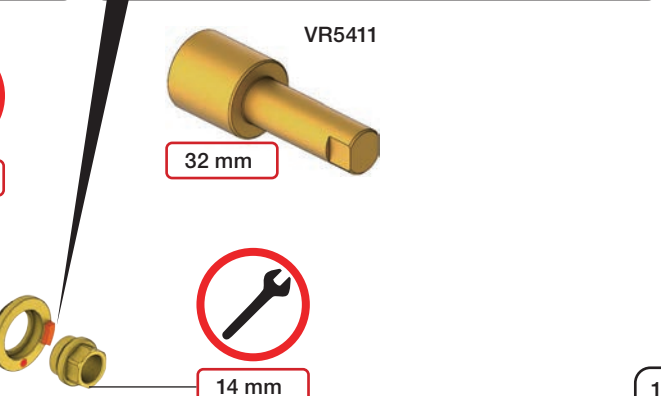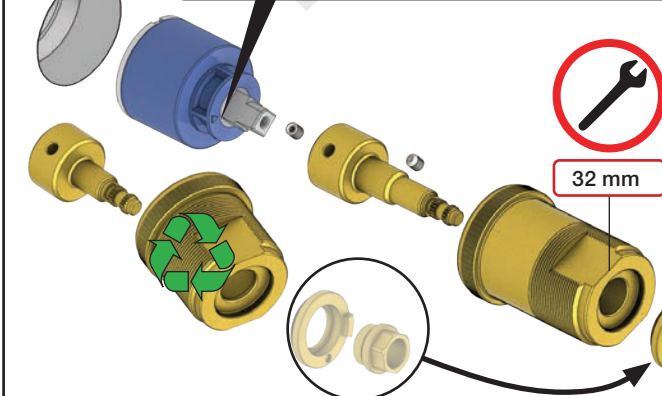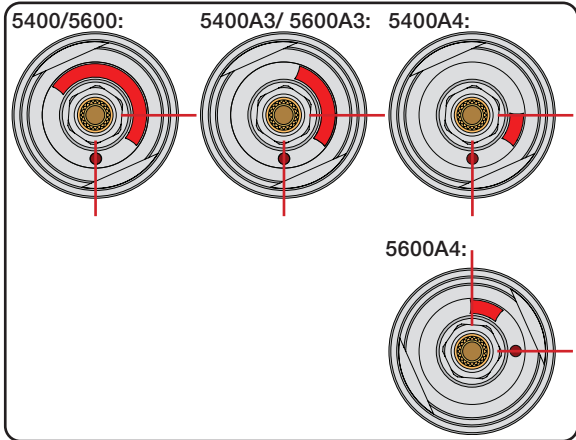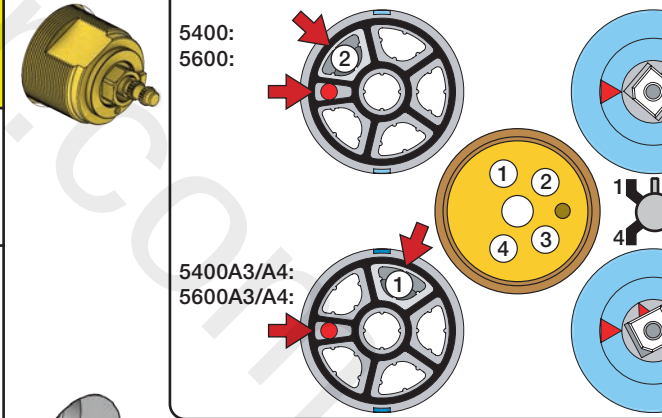



**2x13 mm** Lightweight wall  
Leichtwand  
Let væg


Lätta konstruktion  
Holle wandconstructie  
Construction légère



**1x15 mm**  
**1x18 mm**  
**1x20 mm**


Lightweight wall  
Leichtwand  
Let væg

Lätta konstruktion  
Holle wandconstructie  
Construction légère

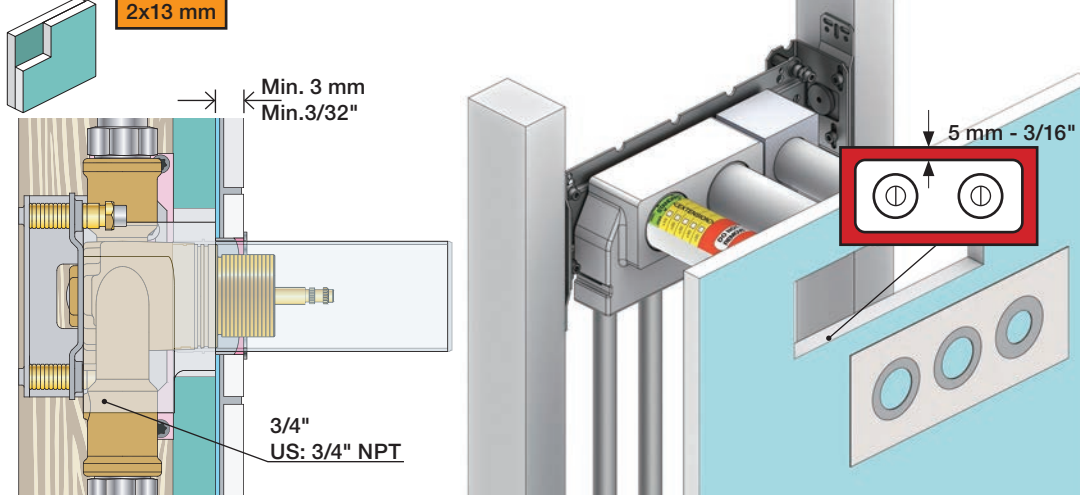

**Masonry**  
**Mauerwerk**  
**Murværk**

**Murverk**  
**Massieve wand**  
**Mur Plein**







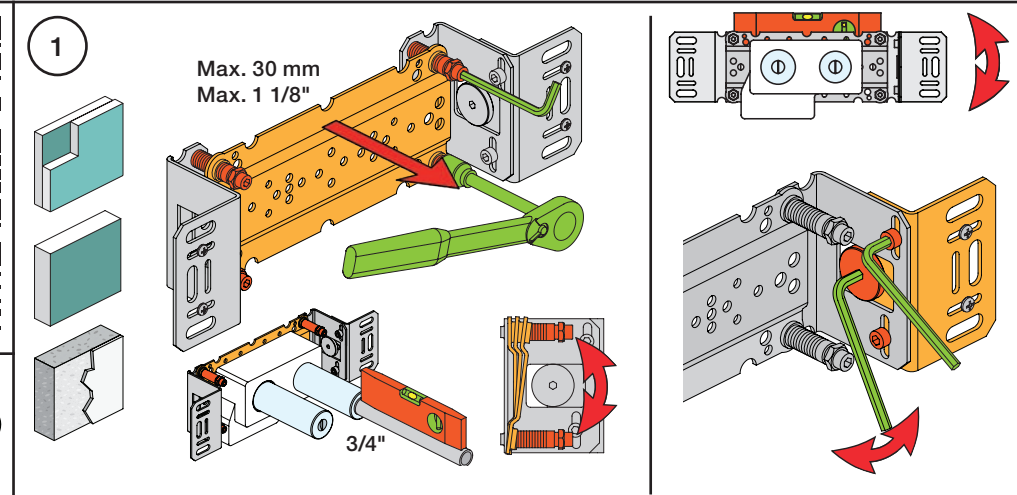




**2**

Test Pressure  
Prüfdruck  
testtryk  
Test tryck  
Test druk  
test de pression

Check the local legislation.  
Bitte die örtlichen Vorschriften überprüfen.  
Tjek de lokale regler.  
Kontrollera lokala föreskrifter.  
Nazitten lokale regelgeving.  
Vérifiez la législation locale.

**! Water - Wasser - Vand - Vatten - Water - L'eau**  
**! MAX 1 Minute - Minut - Minuut !**

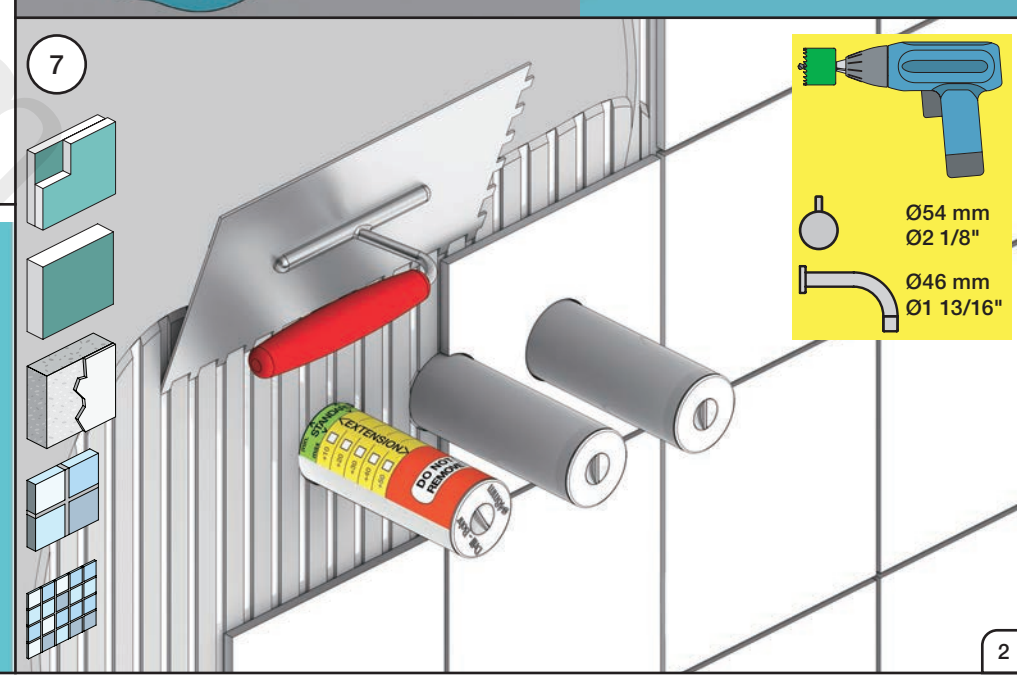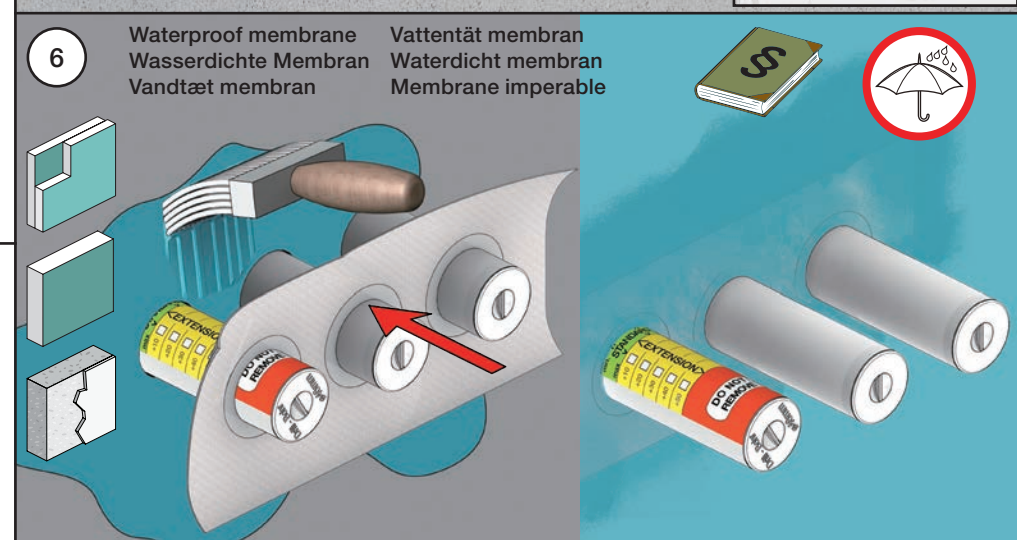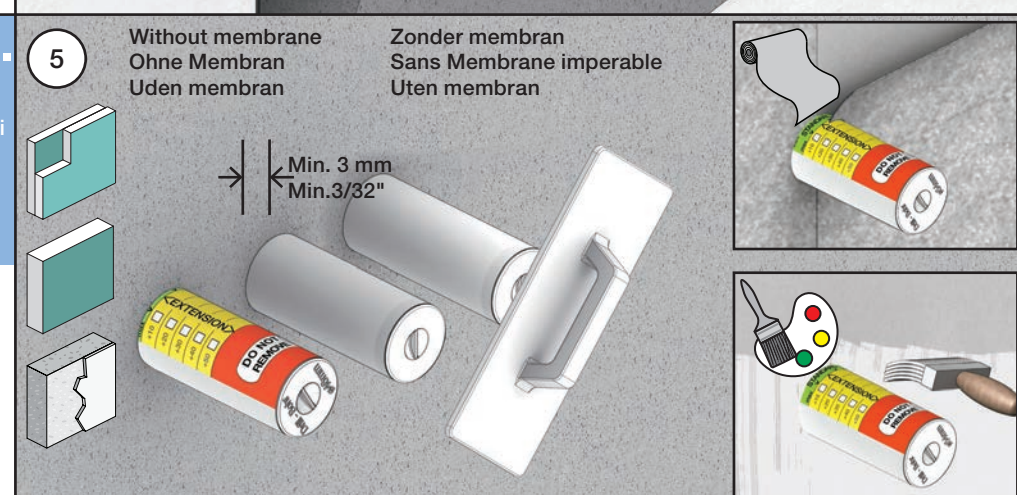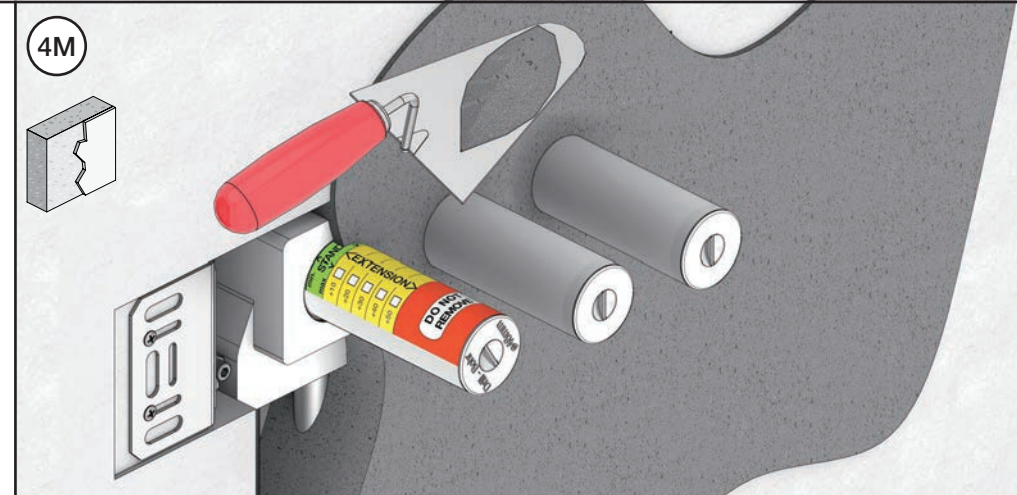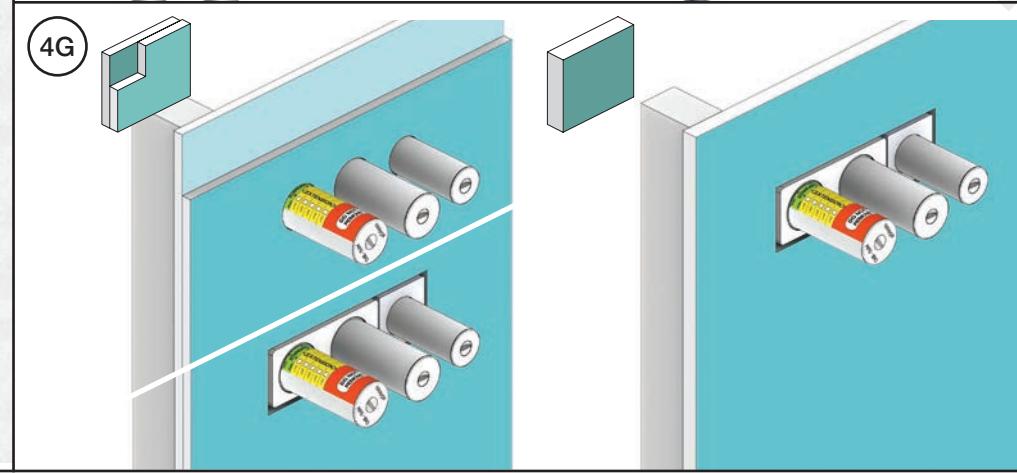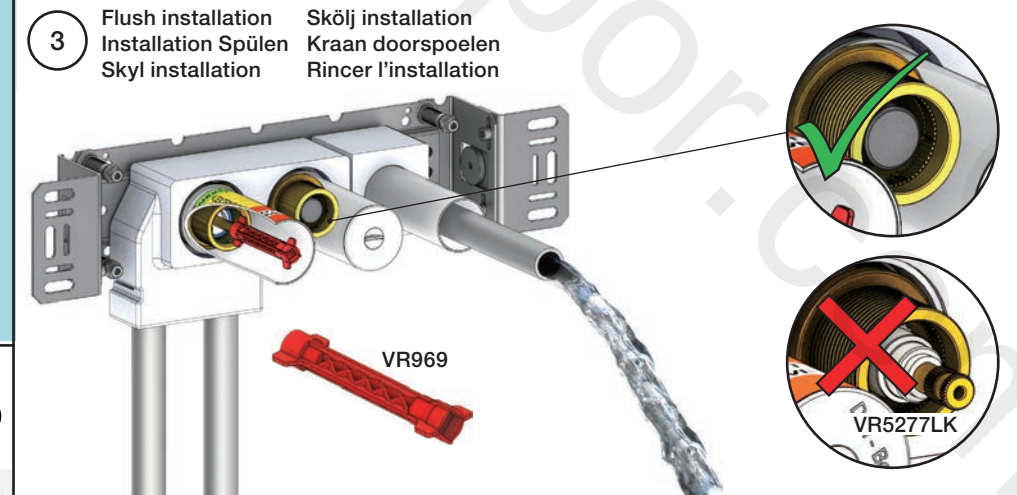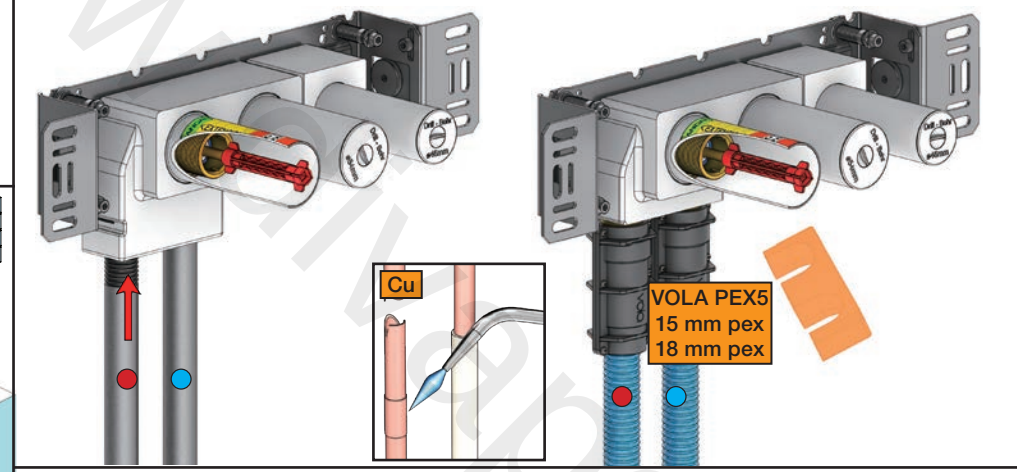


[illegible]

5400NV  
5400TV

2930

5400DV



2934

5003B

5004B

5004L

3x2001

3x2001, 001

3x2001, 001

©  
2001



**VOLA 5400V**  
5400FV, 5400NV  
5400RV, 5400TV  
5600V

5

Sheet  
**SB 10.54**