

06.3106

## DOLPHIN BEHIND MIRROR SOAP DISPENSER

- > Behind mirror; drop-down loading, satin finish stainless steel soap dispenser with 1 litre capacity and chrome soap valve
- > Usage: Medium Traffic Areas
- > Satin stainless steel finish

HEIGHT	295 MM
WIDTH	210 MM
PROJECTION	112 MM

### SPECIFICATION

Behind mirror installation, flat bottom, drop down, soap dispenser: Model number 06.3106 in vertically brushed satin finish stainless steel with lockable drop down mechanism for easy loading. Complete with 1 litre soap container and polished chrome soap valve. Manufactured by Dolphin Solutions Ltd.

### MATERIAL

- > Casing: 0.9mm satin finish stainless steel grade 1.4301 (304)
- > Soap Valve: Polished chrome plated brass
- > Approximate unloaded unit weight: 2kg

## CAPACITY

- › 1 Litre capacity

## OPERATION


- › Soap dispenser holds 1 litre container. Discreet shoot bolt lock secures drop down mechanism, which opens for refilling. To open drop down mechanism, pull shoot bolt situated on the left hand side whilst pressing upwards on the underside fascia with your other hand. Carefully lower the soap valve fascia and compartment down, support the unit with both hands, taking care not to let the unit fall freely. Remove the soap container and unscrew the cap to refill. After filling, re-fit the cap and place the soap container back in its compartment with the cap on the left hand side of the unit. Push mechanism up ensuring the shoot bolt re-locates into its tang. A 'click' should be heard.
- › **N.B.** Do not pull down on the soap valve when in the operating position, this may damage the locking mechanism.

## LIQUID SOAP

- › We recommend using Dolphin solutions ltd 'Pearlised' liquid soap (Product code 06.8305). We do not recommend using high viscosity liquid soaps or gels, which may impair function. Warning: Liquid soap with high sodium chloride content can cause corrosion and may invalidate the product warranty.

## INSTALLATION

- › See diagram opposite
- › Open drop down mechanism by pulling shoot bolt situated on the left hand side of the underside fascia, whilst pressing upwards and steadying the fascia with your other hand.
- › Carefully lower the soap container compartment down.
- › Position the unit at desired height on wall and mark through holes for screw positions. Drill and plug as required.
- › Hang unit on the keyhole slots.
- › Align units rear fixing holes with drilled holes in wall and fix to wall using 4 off suitable countersunk screws (Fixing holes Ø6mm)
- › Close mechanism, ensuring the shoot bolt re-locates into its tang. A 'click' should be heard

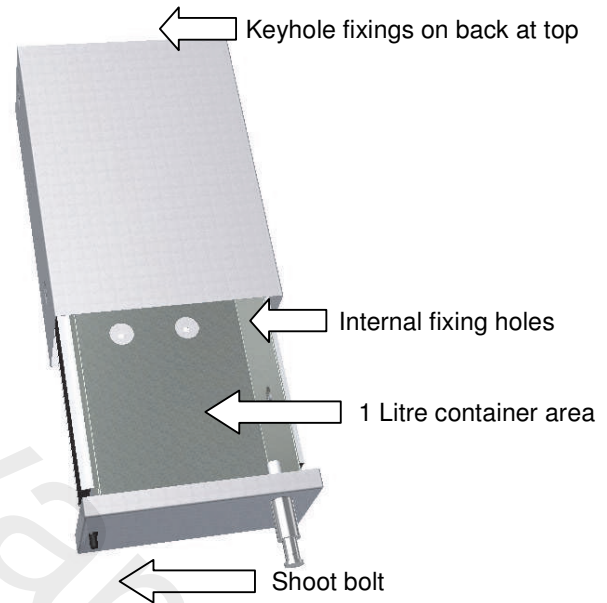

## CARE AND MAINTENANCE

- › If dispenser fails to function, empty the liquid soap from the soap tank and re-fill with warm water. Pump the warm water through the dispenser to dislodge any dried soap residue and then re-fill the container with fresh liquid soap.
- › Use a stainless steel cleaner for brushed stainless steel surfaces. Clean along the grain. Never use an abrasive cloth to remove stubborn stains. Dry with a soft clean cloth.
- › Dolphin Solutions Ltd recommends "Steel Clean" cleaning agent, obtainable from: Vitopan (Tel: 01204 863000)
- › Abrasive cleaners, chloride cleaning agents and carbon steel brushes/steel wool will scratch the stainless steel and must not be used.

## WARRANTY

This product is covered by a 12-month warranty from the date of purchase to be free from defects if installed and maintained in accordance with these instructions. Dolphin Solutions will replace or repair (as appropriate) free of charge any product with a proven manufacturing defect if reported within the warranty period.

Dolphin Solutions Ltd reserves the right to amend the design or dimensions without formal notice.