

# Contour 21 Lever Thermostatic Shower Valve Mounted In Box

## ILLUSTRATED


**A4314** Contour 21 lever operated sequential thermostatic shower mixing valve with mounting box, combined isolating and non-return valves with filters

## ILLUSTRATED PRODUCT DETAILS

### Weights

**A4314** 6.20 KG

### Finishes

**A4314**  Stainless Steel finish (MY)

### Materials

**A4314** Stainless Steel

### Flow rates


**A4314** 4.7 Litres per minute @ 3 bar pressure

## FINISH OPTIONS



### Special Notes

Supplied with A4129AA TMV3 approved shower valve. Minimum operating pressure 1 bar delivering 6 litres per minute.

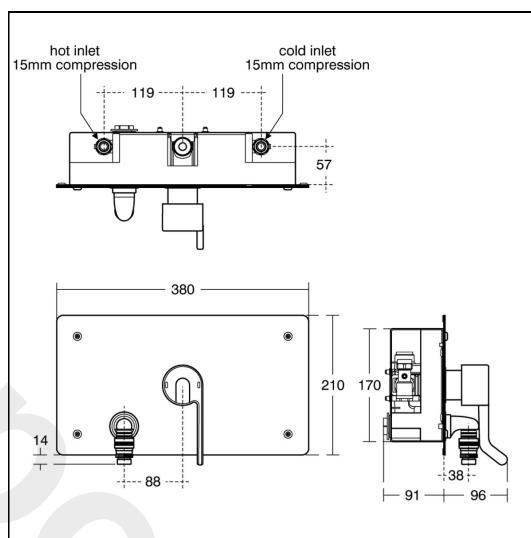

## ACCREDITATIONS



2003002



## FEATURES

