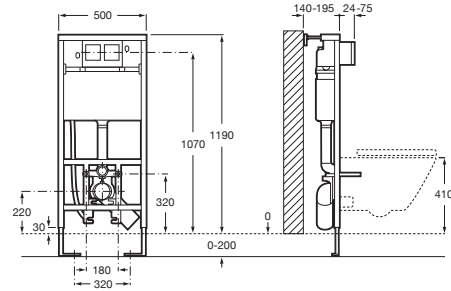IN-WALL

DUPLO WC SMART with AG valve

TECHNICAL DRAWINGS

FEATURES

Dynamic pressure range: 0,1 - 10 Bar

Elbow connection: DN100 (110 mm), DN90 (90 mm)

Flushing type preset: Dual flush 3/6 litres

Minimum fixation depth (mm): 140

Operating panel position: Frontal

Suitable for: Wall-hung WC

Tank depth (mm): 125

Water inlet position: Back, Top

Flushing type	**Flushing type**	**Flushing type**
Flushing type: Dual flush 4.5/3 litres	Flushing type: Dual flush 4/2 litres	Flushing type: Dual flush 6/3 litres

COMPATIBLE WITH

In-Wash® - Vitreous china Rimless wall-hung smart toilet with horizontal outlet. Needs power supply.

803060..1

EP2 - Electronic glass finished operating plate for concealed cistern with automatic or touchless dual flush and adjustable light in multiple colour choice

890102009

EP1 - Electronic glass finished operating plate for concealed cistern with automatic or touchless dual flush and adjustable light in multiple colour choice

890102008

PL5 DUAL - Dual flush operating plate for concealed cistern

89009900.

PL4 DUAL - Dual flush operating plate for concealed cistern

89009800.

PL3 PRO DUAL - Vandal-proof stainless steel dual flush operating plate for concealed cistern

890097004

PL2 DUAL - Dual flush operating plate for concealed cistern

89009600.

PL1 DUAL - Dual flush operating plate for concealed cistern

89009500.

PL10 DUAL - Dual flush operating plate for concealed cistern with matt finishes

89008920.

PL10 DUAL - Dual flush operating plate for concealed cistern

89008900.

PL7 DUAL - Dual flush operating plate for concealed cistern

89008830.

PL7 DUAL - Dual flush operating plate for concealed cistern

89008820.

In-Wall

Systems that combine efficiency and technology, turning them into solutions that look after the design and adapt perfectly to the space concerned. Innovation and the avant-garde join forces to guarantee the best features, where convenience, saving and style are to be found in every detail.

INSTALLATION AND USER MANUALS

[PDF] Installation manual