

Exposed Thermostatic Shower Valve






Product features:

- Metal & ABS construction
- Custom designed for lower range pressures
- · Thermostatic valve for safety & comfort
- · Supplied with adjustable centre inlets
- · Subtle soft sweeping design form

Packaged properties:

Box length: 380 mm Box depth: 75 mm Box width: 175 mm Boxed weight: 2.23 kg Includes pop up waste?: No **Additional comments:**

Product dimensions:

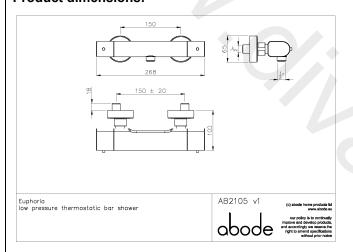

• Overall Height / projection: 100 mm

• Exit reach:


• Exit height:

• Centre distance(s): 150 ± 20 mm

• Base diameter(s): 65 mm Product mounted where: Wall Recommended hole diameter:

• Min. fitting depth required: 60 mm Max. surface depth:

Product flow characteristics:

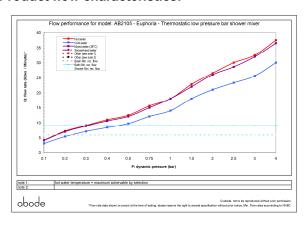

• Min / Max water pressure: 0.2 / 5 bar • Part G mixed flow rate at 3 bar (I/m): 32

• Max water temperature: 70° C Product flow characteristics:

Aerator type:

• Includes output diverter?: No • Control valve type: Thermostatic () • Non return valve position: h&c inlet • Mesh particle filter size: 0.60 mm

• Inlet / outlet size: 1/2" M /

• Inlet type / length: Eccentric / 50 mm

Shower hose type / length:

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year

Care instructions:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
 - Regular cleaning will prevent the build up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of liquid soaps, shampoos and shower foams can also cause damage, so rinse with clean water after using, avoid contact with any abrasives