

Product Finish: Chrome / black

Product code: AT1249
EAN13 barcode: 5060344153577



Note: the image shown may not reflect the product finish, chrome finish is typically depicted.


Product features:

- Supplied complete with flexible tail pipes for fast simple fitting
- Single lever control for effortless single handed control
- Additional jet spray function
- Solid and functional European architect design styling
- Antisplash spout supplied as standard

Additional information / Parts included:

Includes triangular stabilising bracket, 1 x 2.0mm 1 x 2.5mm A/F Allen key - sco06028 kit

Product dimensions:

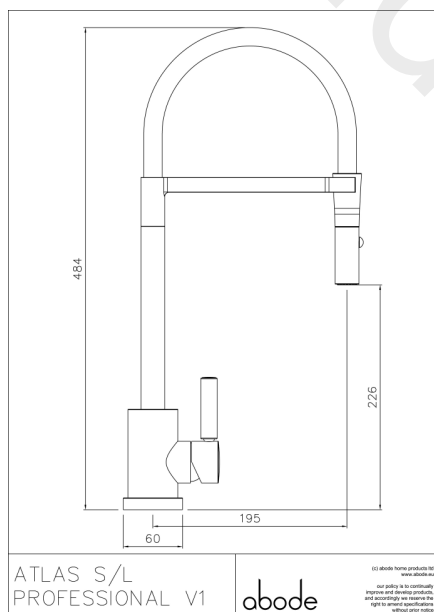

ATLAS S/L
PROFESSIONAL V1

abode

(c) abode home products ltd
www.abode.eu
our policy is to continually
improve and develop products,
and accordingly we reserve the
right to amend specifications
without prior notice

- **Overall Height / projection:** 484 mm
- **Exit reach:** 195 mm
- **Exit height:** 226 mm
- **Centre distance(s):**

- **Base diameter(s):** 60 mm
- **Recommended hole diameter:** Ø 35 mm
- **Max. surface depth:** 60 mm

- **Spout diameter:** 24 mm
- **Spout aerator size:** 22f

Packaged properties:

Box length: 575mm

Box depth: 80mm


Box width: 350mm

Units per outer: 5

Tap only weight: 3.25kg

Boxed weight: 2.28kg

Product flow characteristics:

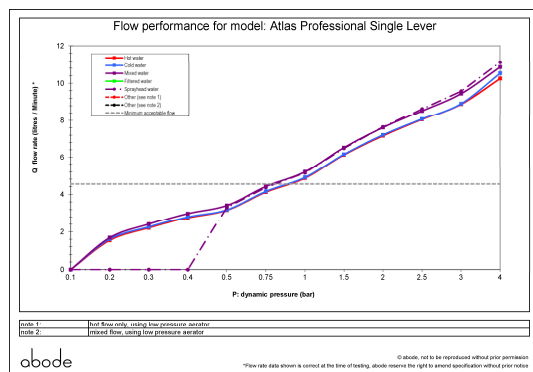

- **Min / Max water pressure:** 0.80 / 5.50 bar
- **Recommended / Max water temperature:** 46°C / 70°C
- **Part G - Mixed flow rate at 3 bar (litres / min):** 09.58

- **Control valve type:** Single lever ceramic cartridge
- **Product flow characteristics:** Single flow
- **Non return valve(s):** Integral to hot & cold inlets

- **Aerator type:** Amfag aerator dual jet
- **Accepts revolve / spray areator:** No
- **Spout connection method:** Grub screw

- **Tail pipe inlet / outlet size:** M12 / 1/2" BSP Male
- **Inlet pipe type / length:** flexible stainless braided hose / 260 mm

Care instructions summary:

- Clean the mixers and showers regularly as required, using soap, do not use any other cleaners.
- Regular cleaning will prevent the build-up of lime scale and dirt
- After cleaning rinse thoroughly with clean water to remove any cleaner residue
- Residues of sink & worktop cleaners can also cause damage, so rinse with clean water after using, avoid contact with any abrasives

Warranty Summary (Full details available on request):

- Materials and workmanship defects warranted for 5 years
- Valves and working parts warranted for 5 years
- Surface warranty defects warranted for 1 year
- O-rings, hoses & gaskets warranted for 1 year