


43066 TONDO

GESSI®

External parts for thermostatic high-capacity built-in part mixer, 3/4" connections. Vertical/horizontal setting up with THREE SEPARATE EXITS. Functioning field from 0,5 bar to 5 bar (for greater pressures integrate water-flow limiting devices). Water-flow capacity to 3 bar with a single exit around 40 l/min.

Technical features

External parts for thermostatic high-capacity built-in part mixer, 3/4" connections. Vertical/horizontal setting up with THREE SEPARATE EXITS. Functioning field from 0,5 bar to 5 bar (for greater pressures integrate water-flow limiting devices). Water-flow capacity to 3 bar with a single exit around 40 l/min.

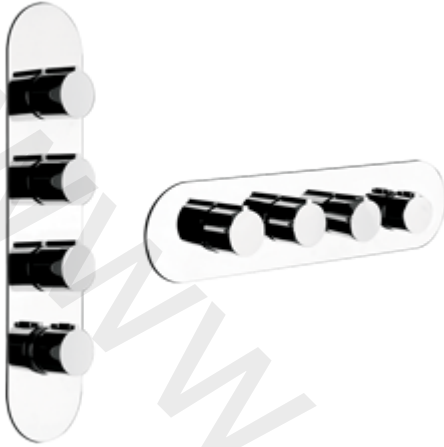

Certifications

Available Finishes

Technical Prescription

- working maximum pressure value 5 bar - in case of higher pressure, to use a pressure reducer
- Working pressure for an optimal installation: 3 bar
- Working water temperature not be higher than 70°C.
- In order to guarantee a long duration of the product and its total functionality install filter
- Test watertight and cleaning of the pipes before installing the tap.