


43236 TONDO

GESSI®

External parts for thermostatic high-capacity built-in part mixer, 3/4" connections. Vertical/horizontal setting up with THREE SEPARATE EXITS. Functioning field from 0,5 bar to 5 bar (for greater pressures integrate water-flow limiting devices). Water-flow capacity to 3 bar with a single exit around 40 l/min.

Technical features

External parts for thermostatic high-capacity built-in part mixer, 3/4" connections. Vertical/horizontal setting up with THREE SEPARATE EXITS. Functioning field from 0,5 bar to 5 bar (for greater pressures integrate water-flow limiting devices). Water-flow capacity to 3 bar with a single exit around 40 l/min.

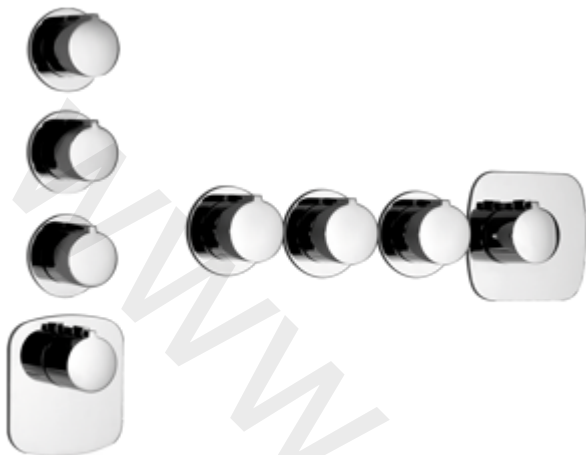

Certifications

Available Finishes

Technical Prescription

- Working maximum pressure value 5 bar - in case of higher pressure, to use a pressure reducer
- Working pressure for an optimal installation: 3 bar
- Working water temperature not be higher than 70°C.
- In order to guarantee a long duration of the product and its total functionality install filter
- Test watertight and cleaning of the pipes before installing the tap.

Indications for the cleaning

Clean only with a microfiber cloth and soapy water and dry properly the item. Detergents, solvents, chemical agents, abrasive sponges, wire wool, alcohol, etc. should not be used as these could irreparably damage product surfaces compromising its aesthetics and brightness.

Accessories and Fittings

For additional matching bathroom accessories and fittings available, see official Gessi price list.