#### **Features**

- Single lever handle allows for both volume and temperature control
- KOHLER ceramic disc valves exceed industry longevity standards for a lifetime of durable performance
- Temperature memory allows faucet to be turned on and off at the temperature set during prior usage
- 0.5 gpm (1.9 lpm) maximum flow rate
- Includes metal pop-up drain with 1-1/4" tailpiece
- 4-3/16" (107 mm) spout reach
- Red/blue indexing on handle
- Coordinates with Honesty faucets accessories, and showering components to complete your bathroom

#### Material

- Brass
- KOHLER finishes resist corrosion and tarnishing

### Installation

- For single-hole installation
- Preattached flexible supply lines simplify installation

#### **Recommended Products/Accessories**

K-23726 Drain treatment

K-23723 Faucet cleaner

K-26633 18" towel bar

K-26634 24" towel bar

K-26635 12" towel bar

K-26636 Robe hook

K-26637 Towel arm

K-26638 Pivoting toilet paper holder



ADA CSA B651 OBC

#### Codes/Standards

ASME A112.18.1/CSA B125.1 NSF/ANSI/CAN 61

NSF/ANSI/CAN 372

All applicable US Federal and State material regulations

DOE - Energy Policy Act 1992

California Energy Commission (CEC)

ADA

ICC/ANSI A117.1

CSA B651

OBC

# KOHLER® Faucet Lifetime Limited Warranty

See website for detailed warranty information.

#### **Available Colors/Finishes**

Color tiles intended for reference only.


| Color | Code | Description              |
|-------|------|--------------------------|
|       | CP   | Polished Chrome          |
|       | BN   | Vibrant™ Brushed Nickel  |
|       | BL   | Matte Black              |
|       | 2MB  | Vibrant™ Brushed Moderne |
|       |      | Brass                    |





# Honesty™

# Single-handle bathroom sink faucet, 0.5 gpm K-99760-4N

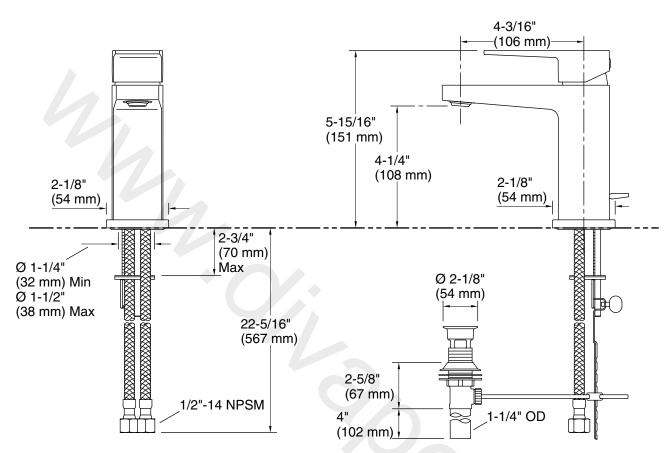

#### **Technical Information**

All product dimensions are nominal.

Faucet:

Flow rate: 0.5 gal/min (1.9 l/min)

Pressure: 60 psi (4.1 bar)

Drain included: Yes
Drain with overflow: Yes

Spout:

Spout reach: 4-3/16" (106 mm)

## **Notes**

Install this product according to the installation instructions.

ADA compliant for handles only.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.

