

AQUALISA


LUMI™

ELECTRIC SHOWER


LME10501

10.5KW WITH ADJUSTABLE HEAD – CHROME

DIMENSIONAL DRAWINGS

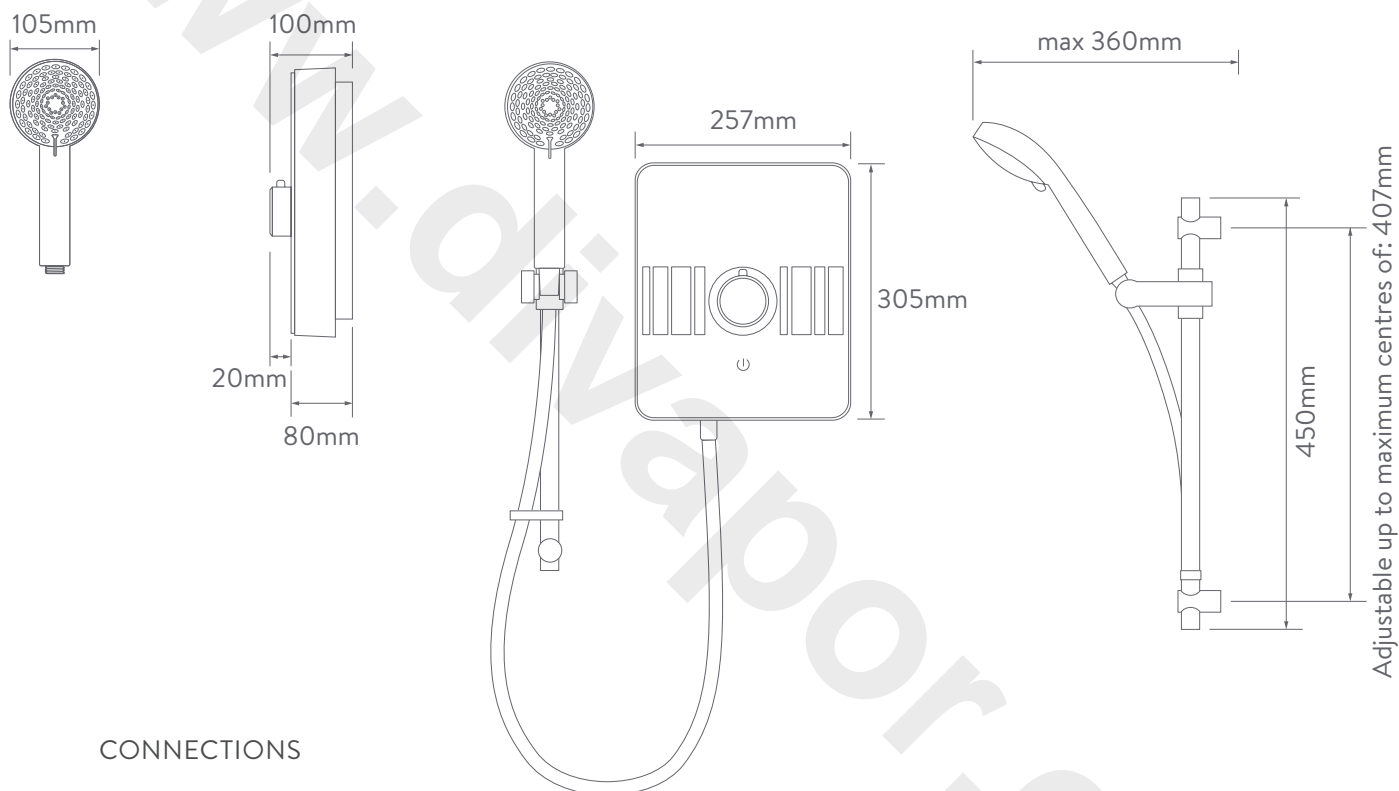

CONNECTIONS

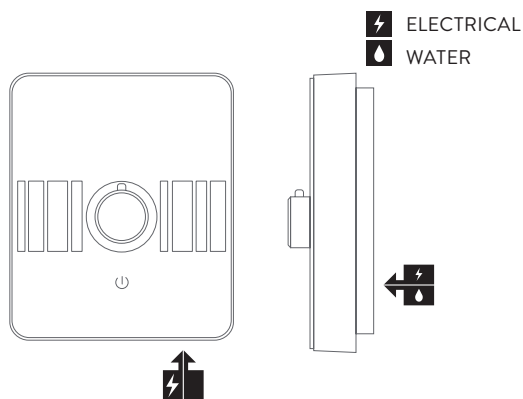

AQUALISA

LUMI™

ELECTRIC SHOWER

LME10501

10.5KW WITH ADJUSTABLE HEAD – CHROME

TECHNICAL SPECIFICATIONS

Power	10.5kW
Minimum pressure	0.9 bar (@8lpm)
Maximum pressure	10 bar
Recommended Maximum pressure	3 bar
Water entry points	Bottom and rear right only
Cable entry points	Bottom and rear right only
Inlet fitting connections	15mm compression
Outlet fitting connections	1/2" BSP thread
Electrical requirements	Supply voltage 230 - 240V, MCB rating 45-50AMP
Water system	Mains cold
Features	Intuitive single dial
	Illuminated touch start/stop control
	Rotary control
	Heat safety features
	Power on indication
	Illuminated panel
	105mm, 5 spray patterns
Colour	Chrome
Guarantee period	Shower unit - 2 years
	Shower head and kit - 2 years
Approvals	CE Marking (LVD; EMC)
	BEAB
	European Water Label
	ERP Directive

The company reserves the right to alter, change or modify the product or product specifications without prior warning. Please refer to the installation guides for technical information.