
PM BSM E6 C

PRISM Tap Range Prism Pillar Bath Shower Mixer Eco6 Chrome



| | | A | res | |
|---|--------|----|-----|-----|
| _ | \sim | | ras | |
| | u | uч | | , , |

- Chrome plated to BS EN 248
- Includes single function rub clean handset, 1.75m hose & wall bracket
- Product supplied with either a 6 or 8 litre per minute flow regulator which can be fitted to the shower hose outlet to reduce water consumption and increase water efficiency

Product Certifications:








For more products, visit our website: http://www.bristan.com



| Specification | | | | | | |
|-----------------------------------|------------------------------------|--|--|--|--|--|
| Product Type: | Taps | | | | | |
| Main Construction Material: | Brass | | | | | |
| Mount Type: | Deck | | | | | |
| Handle Type: | Lever | | | | | |
| Connection Inlet: | 3/4" BSP | | | | | |
| Connection Outlet: | Flow Straightener | | | | | |
| Number of Tap Holes: | 2 | | | | | |
| Valve/Cartridge Type: | 3/4" Ceramic Disc Valve - 1/4 turn | | | | | |
| Plumbing System Requirements: | Suitable for all plumbing systems | | | | | |
| Minimum Dynamic Pressure (bar): | 0.2 bar | | | | | |
| Maximum Dynamic Pressure (bar): | 5.0 bar | | | | | |
| Maximum Hot Water Temperature °C: | 65°C | | | | | |
| Maximum Static Pressure (bar): | 10 bar | | | | | |
| Flow Type: | Single | | | | | |
| Isolation Included: | No | | | | | |
| | | | | | | |

Dimensions (measurements in mm)

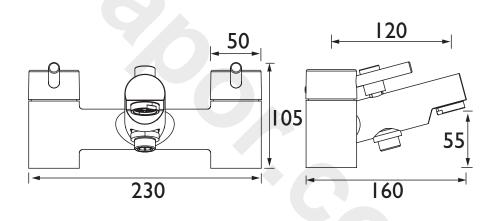

| Flow Rates (I/min) | | | | | | | | | |
|-----------------------------|------|------|------|------|------|------|--|--|--|
| System Pressure (bar) | 0.2 | 0.5 | 1 | 2 | 3 | 5 | | | |
| Through Bath Filler (mixed) | 10.3 | 16.2 | 22.9 | 32.4 | 39.7 | 51.3 | | | |
| Through Handset (mixed) | 6 | 6 | 6 | 6 | 6 | 6 | | | |
| , , | 6 | 6 | 6 | 6 | 6 | 6 | | | |

TECHNICAL DATA SHEET



