


# RS2 SHC3STP C

## RENAISSANCE Shower Range Renaissance 2 Recessed Dual Control Shower With Twin Stopcocks Chrome

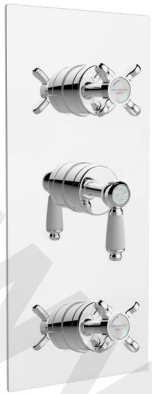

### Specification

Shower Type:	Recessed Dual Control
Style:	Contemporary
Finish/Colour:	Chrome
Main Construction Material:	Brass
Connection Inlet:	15mm Compression
Connection Outlet:	G 1/2"
No of Controls:	3
Valve/Cartridge Type:	Thermostatic
Plumbing System Suitability:	Suitable for all plumbing systems
Minimum Dynamic Pressure:	0.2 bar
Maximum Dynamic Pressure:	5.0 bar
Maximum Static Pressure: (bar)	10
Maximum Hot Water Supply Temperature °C:	65
Pre-set Outlet Temperature: °C	42
Isolation Valve Included:	No
Check Valve Included:	Yes

### Features:

- 15mm inlet connections
- This shower valve has been designed to fit in any UK wall cavity and therefore only needs a 35mm deep cavity space
- Fitting depth including plasterboard and tiles is 45mm - 75mm
- Minimum cold water supply temperature is 4°C
- Maximum hot water supply temperature is 65°C


### Product Certifications:



WRAS Cert. Number: 2007908  
WRAS Expiry Date: 31/08/2025



### Dimensions (measurements in mm)

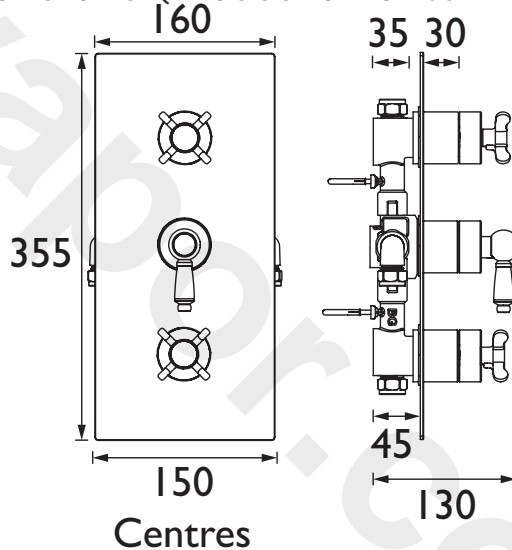

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Outlet 1 With Flow Regulator	3.9	6.2	8.8	10.3	11.1	11.6
Outlet 1 Without Flow Regulator	7.9	14	19.8	28	34.2	44.2
Outlet 2 With Flow Regulator	4	6.3	9	10.3	10.7	11.4
Outlet 2 Without Flow Regulator	7.9	13.8	19.5	27.6	33.8	43.6

For more products, visit our website:  
<http://www.bristan.com>



# TECHNICAL DATA SHEET



# BRISTAN