

shower controls - Time Flow Shower Controls

Introduction

Water conservation is essential and in some public establishments where multiple water outlets are used, the Inta range of Time Flow Control systems are an eco-friendly, stylish and economical solution to the problem of water wastage. All of the Inta Time Flow Controls are designed to work with the Intamix range of the Thermostatic Mixing Valves



Time Flow Shower Exposed TF997CP

- Simple operation
- Closes automatically
- Water economy
- Non concussive operation
- Operating pressure range of 0.1 to 5 bar
- Exposed, Concealed and Cross-wall options available



Time Flow Shower Concealed TF997CP

Product Range

Description		Code
Time Flow Shower Control - Expo	osed	TF992CP
Time Flow Shower Control - Con	cealed	TF997CP





shower controls - Time Flow Shower Controls


Features

Technical Specification

Max Inlet Pressure	10 Bar (static)
Min Inlet Pressure	0.1 Bar (dynamic)
Max Inlet Temperature	65°C
Timed flow (standard)	15 seconds at 1 bar

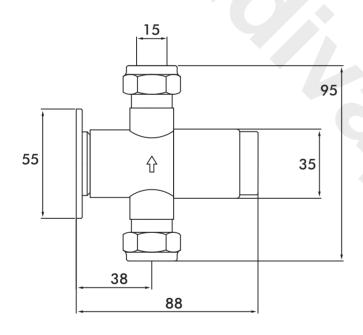



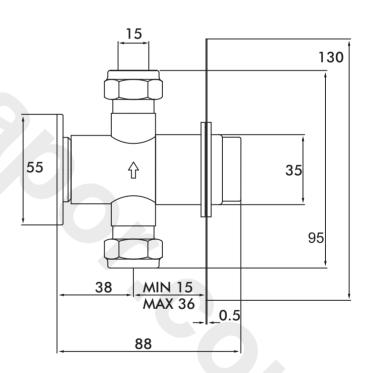

Time Flow Shower Concealed TF997CP

