TFP4001

COMMERCIAL Shower Range Timed Flow Shower Panel With Adjustable Head



		+	roc:
Г'	eа	ιu	res:

- Supplied pre-plumbed and ready for connection to a preblended supply
- Water saving push button operation with timed flow
- Vandal resistant shower head with adjustable spray angle
- Easy installation
- 15mm inlet connection


Product Certifications:




For more products, visit our website: http://www.bristan.com



Specification						
Style:	Contemporary					
Finish/Colour:	Chrome					
Main Construction Material:	Steel					
No of Controls:	1					
Shower Type:	Timed Flow Shower					
Maximum Static Pressure: (bar)	10					
Plumbing System Suitability:	All - Ideally Balanced					
Working Pressure Range:	Min. 0.1 Bar - Max. 5.0 Bar					
Connection Inlet:	3/4" BSP male telescopic connection					
Connection Outlet:	N/A					
Check Valve Included:	No					
Flow Type:	Single Flow					



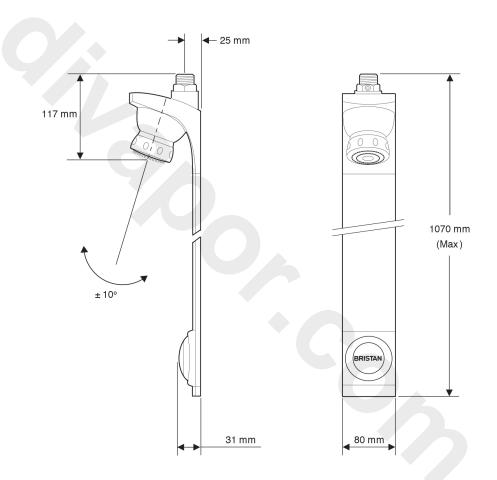

Flow Rates (I/min)									
System Pressure (bar)		0.5	1	2	3	5			
Through Handset (mixed)	3.5	5.6	8	10	10	10			

TECHNICAL DATA SHEET



