

# Z2 SQR 1/2 C

## COMMERCIAL Tap Range Single Pillar Basin Soft Touch Timed Flow



### Features:

- Timed shut-off to meet BS EN 816
- Soft touch easy to use mechanism
- Supplied with both hot and cold indices
- Supplied with 5l/min flow regulator (not fitted)
- Operates at a minimum pressure of 0.5 bar

### Product Certifications:

WRAS No: 1401911  
WRAS Expiry Date: 31/01/2019




For more products, visit our website:



### Specification

Style:	Contemporary
Product Type:	Bathroom taps
Finish/Colour:	Chrome
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Push Button
Connection Inlet:	1/2" BSP
Number of Tap Holes Required:	1
Valve/Cartridge Type:	Self Closing Valve
Plumbing System Suitability	All
Working Pressure Range:	Min. 0.5 bar - Max. 5.0 bar
Maximum Hot Water Temperature: °c	65
Maximum Dynamic Pressure: (bar)	5
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Flow Rate: (l/min @ 3 bar)	35.5
Connection Outlet:	Open
Isolation Included:	No

### Dimensions (measurements in mm)

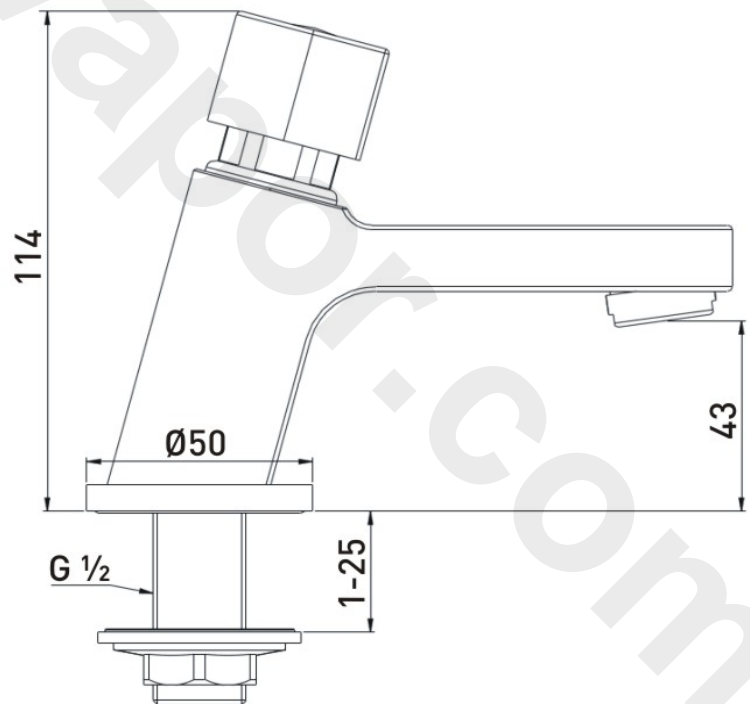

### Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3	5
Z2 SQR 1/2 C	7.5	14.5	17	26.5	35.5	45.9

TECHNICAL  
DATA  
SHEET



**BRISTAN**  
TAPS & SHOWERS

D8