




DS104

# DOLPHIN WALL PLATE MOUNTED INFORM (SMART) TAP

# INSTALLATION AND MAINTENANCE GUIDE

### PRODUCT CODES

DS104.130	> 130mm Projection
DS104.180	> 180mm Projection
DS104.230	> 230mm Projection
DS104.280	> 280mm Projection
DS104.330	> 330mm Projection

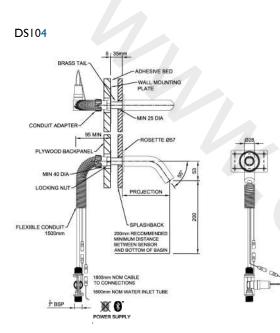

# TECHNICAL DATA

> Dolphin Wall Plate Mounted InForm (SMART) Tap

 $\,>\,$  Manufactured from high-quality, highly durable 1.4401 (316) Marine grade stainless steel.

> Self-Monitoring Analysis and Recording Technology (SMART) allows the Facilities Manager to connect point to point via the Dolphin SMART App when used with the optional Bluetooth Adaptor (Sold separately -Order product code 25148 )

> Infra-Red Touch Free Tap for ultimate hygiene prevents cross contamination Sensor mounted in end of spout

> Designed to be front mounted for when rear access installation is not possible

> Flow rate - 3.78 litres/minute with the standard fitted flow regulator

(contained within Neoperl TT cache aertor) at any pressure between 0.5 and 6  $\mathrm{bar}^*$ 

> Other flow rates including 1.89 litres/minute available to special order please enquire  $^*$ 

> Water Supply: Single inlet cold or pre-mixed a TMV2 or TMV3 thermostatic mixing valve is recommended for premixed applications

- > Maximum operating water temperature 60°C
- > Power Supply: \*
- > Nominal Current: Less than ImA (Less than 25mA with Bluetooth)
- > Nominal Power: Less than IW
- > Security Time can be adjusted via the App
- Default 20 Seconds (60 Seconds max)
- > IP68 Connector

 $\ast$  See page 4 for power supply, flow rates and other options

### PRODUCT CODES

 DS104.130
 > 130mm Projection

 DS104.180
 > 180mm Projection

 DS104.230
 > 230mm Projection

 DS104.280
 > 280mm Projection

 DS104.330
 > 330mm Projection

Coding Explained

Style

DS104 55° Bent Spout - Wall Mounted DS10X.XXX.X

### Projection

130/180/230/280/330mm DS10X.XXX.X

### Finish

I Brushed Satin 2 Mirror Polished 3 PVD Brushed 4 PVD Mirror 5 Powder Coated DS10X.XXX.0

Colour Suffix to end of code (Number allocated by Dolphin Solutions)

### Example Coding DS104.130.1

55° Bent Spout 130mm Projection Brushed Satin Finish Options Bluetooth PVD Powder Coating

# PACK CONTENTS

I	25036	Solenoid Adapter	
2	25698	6v DC Solenoid	
3	25035	1/2 Cartridge	
4	25030	8mm Tube	1
5	25275	Tail	(1
6	25350	M20x1.5P 1/2 Nut	
7	25274	Backplate	
8	25273	Rosette	
9		Body	
10	25031	M5x5 Grub Screw	
11	25048	M5x6 Grub Screw	
12	25041	Aerator	
13	25040	Aerator Housing	
14	25146	Sensor Assembly	i.
15	25272	Conduit Adapter	
16	25276	Conduit	ē
	25549	M5 Allen Key	1
	25547	Aerator Key.	16
N. D. E			
N.B. For replacements I&3 🛛 🐂			

come as an assembly Part No. 25655





Power Supply Options:\* 25147 UK Mains Adpator 25428 EURO Mains Adaptor 25240 Hardwire Transformer 25241 Battery Pack

€ °C 60 ✓ Sint L/min 3.78 max @ 2 bar

### PRE INSTALLATION

Bar

0.5 min

6.0 max

> Please check that all the components in the list above are present and that they are in good condition before installation. If any components are missing contact Dolphin Solutions.

# A WARNING


> Highly reflective surfaces directly beneath the sensor of this product, in particular polished finish basin wastes/strainers, will cause false activation of the infrared sensors and can result in malfunction. We recommend Satin or Matt finish products which can be found on our website.


> Sitting water may also cause the tap to activate

> All Plumbing and Electrical installation must be carried out by a qualified person and in accordance with applicable codes and regulations.

> Do not kink the water supply hose.


### INSTALLATION

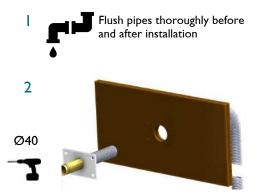

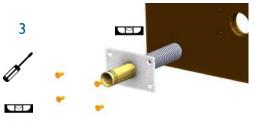

Fix the wall Tail/Mounting Plate assembly with 4 screws supplied. IMPORTANT: Slot to be on underside of tail. Ensure wall plate is level as this dictates tap angle and rotation.

Protect Brass Tail with low tack tape / other suitable method



Insert in order - plugged cables and then pipe from the tap into mounting assy and feed through. **DO NOT** Remove connectors from cable or pipe ends until after they have passed through the conduit.

## 5

Δ

Remove Protective tape from tail. Fit Rosette (if required) over mounting assembly. Slide tap body onto mounting assy and secure with grub screw from beneath



7 Switch on power supply


 > The sensor is self adjusting.\*
 \*Further adjustments can be made by purchasing the Bluetooth Adaptor and downloading the App



Open hot and cold water supply and check that connections are watertight.

### MAINTENANCE

DO NOT use steel wool or cleansing agents containing alcohol, acid, abrasives or the like. Use of any prohibited cleaning or maintenance products or substances could damage the surface of the tap. For surface cleaning of tap use ONLY soap and water then wipe dry with a clean soft cloth. Protect taps from splattering of harsh cleansers when cleaning surroundings.

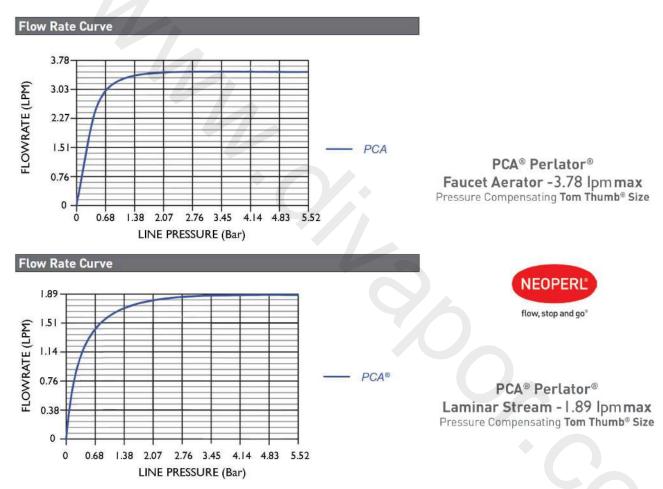

# POWER SUPPLY OPTIONS

### UK MAINS ADPATOR PRODUCT CODE 25147 (Other Adaptor pin and power supply configurations available upon request):

- > Input voltage: 100 240V AC +/- 10%, 50 60 Hz
- > Output voltage: 6.75V DC + 0.15V/ -0.35 V
- > Secondary current: 0 350 mA DC

> Buffer capacitors: The adaptor secondary contains 3 buffer capacitors (necessary to close the solenoid valve in case of power outage):

- 2 x 2200 μF,
- I x 100µF

Certifications: EN 60335-1, EN 60950-1 > Im Cable

#### HARDWIRE TRANSFORMER PRODUCT CODE 25240

- > Input voltage: 100 240V ± 10% 50-60 Hz ± 3 Hz
- > Output voltage: 6.6V DC ± 5%
- > Secondary current: 200 mA DC

> Buffer capacitors: one buffer capacitor 4700  $\mu F$  (necessary to close the solenoid valve in case of power outage) Certifications: EN 60335-1, EN 61558-2

> Im Cable (Transformer to Tap), 2m Cable (Transformer to Mains)

# BATTERY PACK PRODUCT CODE 25241

> Requires a 6V lithium battery (CR-P2, approx. 1.500mAh) which has a lifetime of 200.000 switching cycles or 3-5 years depending on user frequency.

> 100mm Cable (Approx)

> Important note - the battery unit can't be used in combination with the Bluetooth adaptor.

The battery unit contains the CR-P2 battery as delivery content. The housing enables a fixation on wall by using the mounting clips (part of the housing but screws are not included) or the rear affixed Velcro tape

# BLUETOOTH ADAPTOR PRODUCT CODE 25148



Bluetooth<sup>®</sup> version 4.0.

The **current version** of the app required for using the system **must** be installed on the control unit in advance. The App is available for free in the iTunes Store (requires an Apple account) and the Google Play store (requires a Google account).

For operation under adverse environments, in buildings / rooms with reinforced concrete walls, steel and iron frame, or near of obstructions (eg furniture) of metal, the Bluetooth reception can be disturbed and interrupted.

# Bluetooth<sup>®</sup>:

Power consumption:	Less than 25mA
Output:	Bluetooth <sup>®</sup> - Class 2
<i>Bluetooth<sup>®</sup></i> - version:	4.0
Bluetooth <sup>®</sup> - Transmission distance: abou (depending on the environments)	
Automatic safety shut-off:(10/20/60 seconds - adjustable)	
Run-on time (0 - 10 s adjustable):	l s

Detection Range - Levels I to 10 (10 = 120mm approx) 10