FRZ BSM C

FRENZY Tap Range Frenzy Bath Shower Mixer Chrome



Specification				
Product Type:	Bathroom Tap			
Main Construction Material:	Brass			
Mount Type:	Deck			
Handle Type:	Lever			
Connection Inlet:	G3/4"			
Connection Outlet:	M28 Flow Straightener			
Number of Tap Holes:	2			
Valve/Cartridge Type:	1/4 Turn 3/4" Ceramic Disc Valve			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.3 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single			
Isolation Included:	No			

Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal back nuts for added durability
- Includes 1.75m hose, rub-clean anti-limescale handset and wall bracket
- Chrome plated to BS EN 248

Product Certifications:



WRAS Certificate No: 2003042 WRAS Expiry Date: 31/03/2025






For more products, visit our website: http://www.bristan.com



Dimensions (measurements in mm)

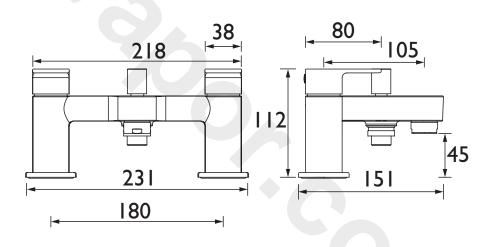

Flow Rates (I/min)								
System Pressure (bar)	0.3	0.5	1	2	3	5		
Through Bath Filler (mixed)	11.2	14.5	20.4	28.9	35.4	45.7		
Through Handset (mixed)	4.9	6.3	8.9	12.6	15.4	19.9		

TECHNICAL DATA SHEET



