AMR EFSNK C

AMARETTO Tap Range Amaretto Easyfit Sink Mixer Chrome



Features:

- Long life and easy to use 1/4 turn ceramic disc valves
- Metal fixing nut for added durability
- Minimum working pressure of 0.4 bar
- Easyfit base included
- · Flexible tails included

Product Certifications:






For more products, visit our website: http://www.bristan.com



Specification				
Product Type:	Kitchen Taps			
Main Construction Material:	Brass			
Mount Type:	Deck Mounted			
Handle Type:	Lever Handle			
Connection Inlet:	1/2" BSP Flexible Tails			
Connection Outlet:	Aerator			
Number of Tap Holes:	1			
Valve/Cartridge Type:	35mm Cartridge			
Plumbing System Requirements:	Suitable for all plumbing systems			
Minimum Dynamic Pressure (bar):	0.4 bar			
Maximum Dynamic Pressure (bar):	5.0 bar			
Maximum Hot Water Temperature °C:	65°C			
Maximum Static Pressure (bar):	10 bar			
Flow Type:	Single Flow			
Isolation Included:	Yes			



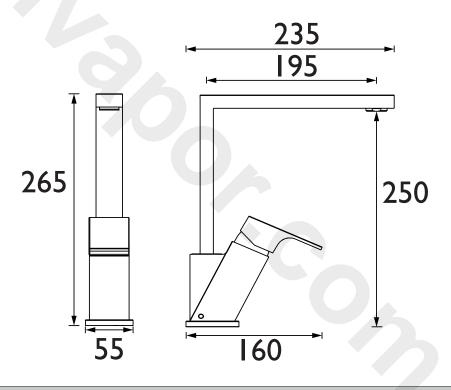

Flow Rates (I/min)								
System Pressure (bar)	0.4	0.5	1	2	3	5		
AMR EFSNK C (mixed)	7.5	8.4	11.8	16.7	20.5	26.5		

TECHNICAL DATA SHEET



