AR2 THBSM C

ARTISAN Tap Range Artisan Thermostatic Bath Shower Mixer Chrome



Features:

- Thermostatic control for bath and shower
- Dual control flow and temperature are controllec separately
- Pre-set maximum temperature at 38°c can be overidden by the user
- Minimum working pressure of 0.5 bar
- Supplied without shower kit

Product Certifications:


WRAS Cert. Number: 2010043 WRAS Expiry Date: 31/10/2025

27.9 L/Min

SWRAS

Product Type:	Bath Shower Mixer
Main Construction Material:	Brass
Mount Type:	Deck Mounted
Handle Type:	Oval Handles
Connection Inlet:	3/4"BSP
Connection Outlet:	G1/2"
Number of Tap Holes:	2
Valve/Cartridge Type:	1/2" CD Valve & Thermostatic Cartridge
Plumbing System Requirements:	Nominally Balanced Supply Pressures Only
Minimum Dynamic Pressure:	0.5 bar
Maximum Dynamic Pressure:	5.0 Bar
Maximum Hot Water Temperature: °C	80
Maximum Static Pressure: (bar)	10
	Single Flow
Flow Type:	Single Flow

Specification

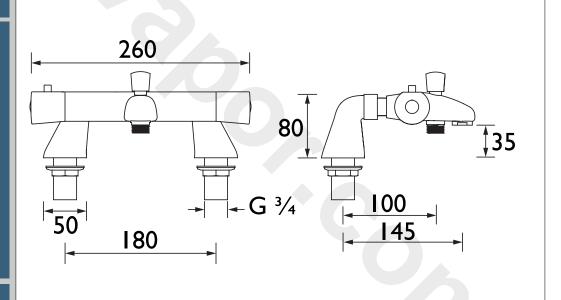

2

22.7

3

27.9


5

36

D8

For more products, visit our website: http://www.bristan.com



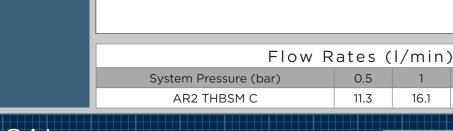

TECHNICAL DATA SHEET

Bristan, Birch Coppice Business Park, Dordon, Tamworth, B78 ISG. Web Site: www.bristan.com Telephone: 0330 026 6273. Email: enquire@bristan.com.

The information contained on this page was correct at date of issue. Fitting Dimensions are provided as a guide only. Some variation may occur due to manufacturing tolerances. Bristan pursues a policy of continuing improvement in design and performance of its products and so reserves the right to change specifications without prior notice.