OP SHXVO EH C

COMMERCIAL OPAC Shower Range

Opac SHXVO Exposed Handle Valve Only Chrome



- Cool touch shower valve body for ultimate user safety
- Easy installation with a choice of fixing kits (OP SHXVO WMT or OPSHXVO WMT2)
- Integral flushing mechanism for easy maintenance
- High performance even at low pressure
- Complies to D08 specification

Product Certifications




Other products from the OPAC range can be found at our website:



Specification				
Style:	Commercial			
Finish/Colour:	Chrome			
Main Construction Material:	Brass			
No of Controls:	2			
Shower Type:	Bar			
Temperature Control:	Thermostatic			
Shower Head Type:	Valve Only			
Maximum Temperature Setting: °C	41			
Maximum Hot Water Temperature: °C	80			
Dynamic Pressure Range: (bar)	Min. 0.2, Max. 5.0			
Maximum Static Pressure: (bar)	10			
Plumbing System Suitability:	All - Ideally balanced			
Flow Rate (I/min @ 3 bar)	11.8			
Flow Regulator:	Yes			
Connection Inlet:	15mm compression			
Connection Outlet:	1/2" BSP			

Dimensions (measurements in mm)

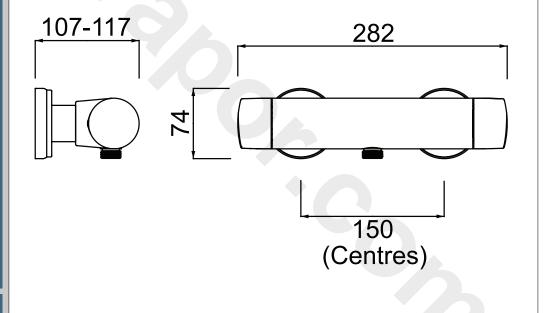

Flow Rates (I/min)										
System Pressure (bar)	0.2	0.5	1	2	3	4	5			
OP SHXVO EH C (Flow Regulators Fitted)	-	9.4	9.5	11.3	11.8	11.7	11.4			
OP SHXVO EH C (Without Flow Regulators Fitted)	8.5	15.1	22.0	-	-	-	-			

TECHNICAL DATA SHEET

BRISTAN