

Z L 1/2 C

SELF CLOSE Tap Range Single Timed Flow Toggle Control Basin Pillar Tap 6lpm Chrome



Features:

- Toggle action
- 15 second time delay
- Supplied with 6 l/m flow regulator
- Supplied with cold and hot indices for flexibility
-

Product Certifications:

WRAS Certificate No: 1503950
WRAS Expiry Date: 31/03/2020




For more products, visit our website:



Specification

Style:	Contemporary
Product Type:	Taps
Finish/Colour:	Chrome
Main Construction Material:	Brass
Mount Type:	Deck
Handle Type:	Toggle
Connection Inlet:	1/2" BSP
Number of Tap Holes Required:	1
Valve/Cartridge Type:	Automatic Shut-Off Valve
Plumbing System Suitability	All
Working Pressure Range:	Min. 0.2 bar, Max. 3.0 bar
Maximum Hot Water Temperature: °c	65
Maximum Dynamic Pressure: (bar)	3
Maximum Static Pressure: (bar)	10
Flow Type:	Single Flow
Flow Rate: (l/min @ 3 bar)	35.6
Connection Outlet:	
Isolation Included:	No

Dimensions (measurements in mm)

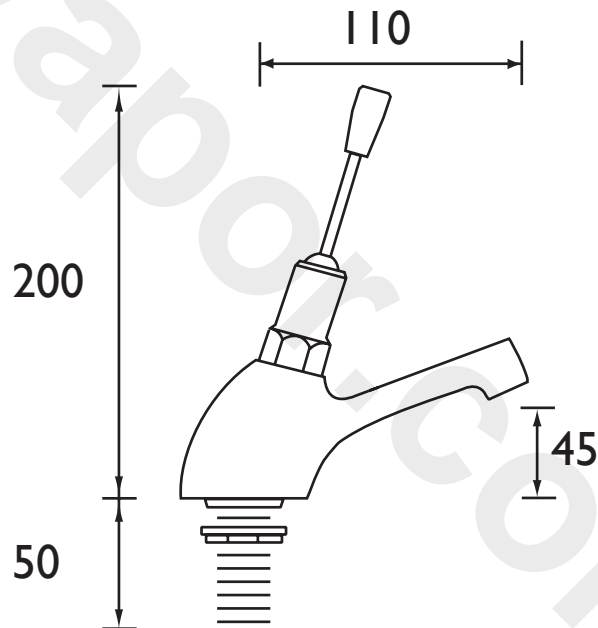

Flow Rates (l/min)

System Pressure (bar)	0.2	0.5	1	2	3
With Flow Regulators	1.3	3.3	4.8	5.6	6.3
Without Flow Regulators	8.5	14.1	20.4	29	35.6

TECHNICAL DATA SHEET



BRISTAN

TAPS & SHOWERS

D6